

Multi zone inverter mini split

MODEL: TM12HTDI

TOSOT

Job Name: _____

Engineer Name: _____

System No: _____

- File Resubmit
 Approval Other

Location: _____

Contractor: _____

Date: _____

General Features

- 2 Thermistor control
- 24-Hour on/off Timer
- Auto operation
- Auto restart
- Chaos swing
- Control lock function
- Drain Pump
- Inverter
- High And Low Pressure Protection Features
- Load Protection Features
- Over-Current Protection
- Anti Freeze Protection
- Wireless Remote control
- Optional Wired controller



Unit Performance:

Nominal Cooling Capacity (Btu/h)	11,900
Nominal Heating Capacity (Btu/h)	13,100

Set Temperature

Cooling (°F WB)	61~86
Heating (°F DB)	61~86

Piping

Liquid Line (in, OD)	1/4
Gas Line (in, OD)	3/8
Drain OD, ID (in)	1.22

Electrical Specification

Power Supply	208-230V / 60Hz
Communications Wire Size	AWG 14/4
Rated Amps (A)	0.28

Fan

Type	Centrifugal
Quantity	4
Motor/Drive	Direct Drive
Air Flow Rate (CFM)	383/324/265

Unit Specification

Refrigerant Type	R410A
Refrigerant Control	EEV
Sound Pressure (dB(A))	40/38/36
Primary Filter	Yes
Net Weight (lbs)	88.1
Dehumidification (Pt/h)	2.96




Multi zone inverter mini split

MODEL: TM12HTDI

TOSOT

Outline Dimension Diagram

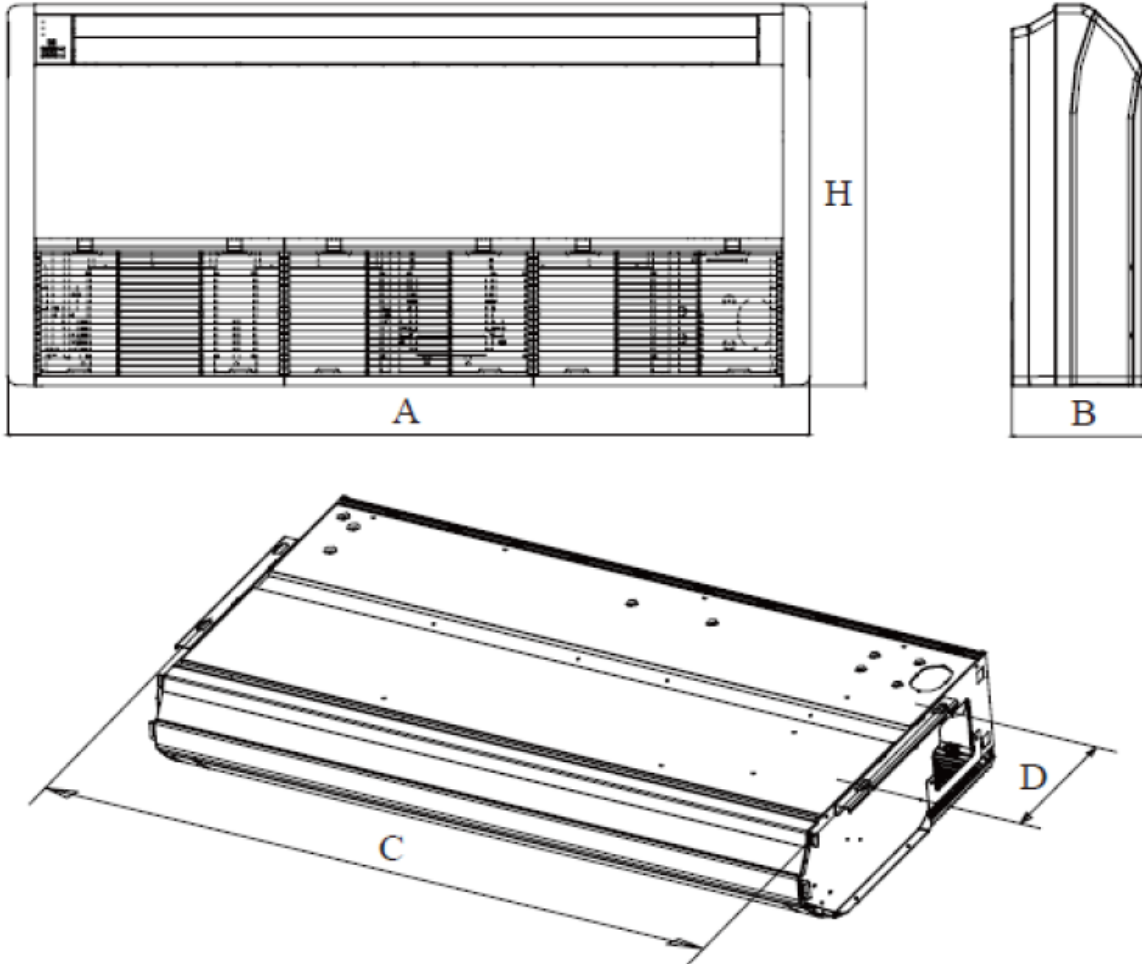

A	B	H	C	D
1220	225	700	1158	280
48 1/32	8 55/64	27 9/16	45 19/32	11 1/32

GLOSSARY

SEER - Seasonal Energy Efficiency Ratio

EER - Energy Efficiency Ratio

HSPF - Heating Seasonal Performance Factor

MOP - Maximum Overcurrent Protection

MCA - Minimum Circuit Ampacity

TOSOT

5965 Chemin de la Côte de Liesse
Saint laurent, QC, Canada, H4T 1C3

Contact: +1 438 792 1956

info@tosotusa.com

www.tosotusa.com