

VRF Indoor	MODEL: TVRF-IEFC18KHP	TOSOT
------------	-----------------------	--------------

Job Name: _____
 Engineer Name: _____
 System No: _____

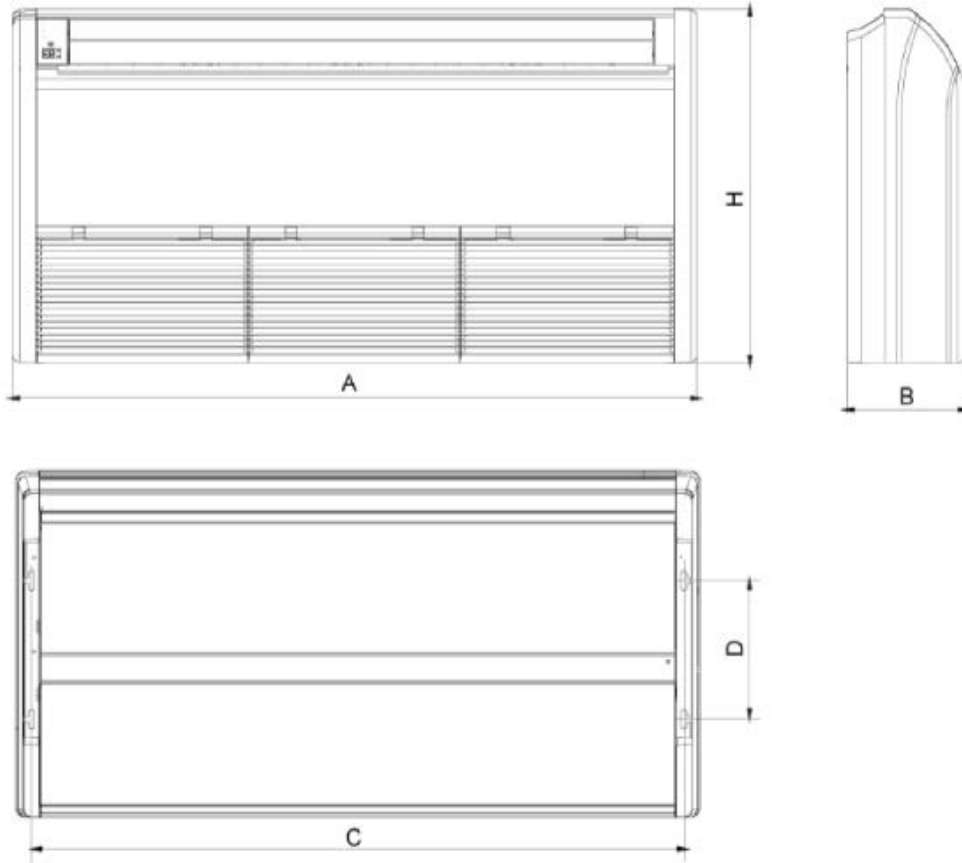
Location: _____
 Contractor: _____
 Date: _____

Indoor VRF SYSTEM FEATURES

- * Hoisted Or Seated, Flexible Installation
- * Beautiful Appearance
- * Protection Function
- * Horizontal And Vertical Air Swing



Specifications		Model Name
Unit Type		TVRF-IEFC18KHP
Cooling Capacity	Btu/h	18,000
Heating Capacity	Btu/h	20,000
External Dimensions (WxHxD)	In.	48 x 27 9/16 x 8 7/8
	mm	1220×700×225
Net Weight	Lbs. / Kg	88/40
Electrical Power Requirements	Voltage, Phase, Hertz	208/230V, 1-phase, 60HZ
Power Cooling Consumption	kW	0.05
Power Heating Consumption	kW	0.05
Current Cooling	A	0.5
Current Heating	A	0.5
Minimum Circuit Ampacity (MCA)	A	1
Max. Overcurrent Protection (MOCP) Fuse	A	15
Refrigerant Piping Dimensions (In./mm)	Liquid (High Pressure)	3/8 - 9.52
	Gas (Low Pressure)	5/8 - 15.9
Sound Pressure Level	dB(A)	42/38/33
<u>Fan</u>		
Type x Quantity		Centrifugal x 4
Airflow Rate	CFM	560/510/410
<u>Motor</u>		
Motor Type x Quantity		BLDC FG60A-ZL x 1
Motor Output	kW	0.06
Refrigerant		R410A
Coil Type		Aluminum fin-copper tube
Unit Color		White

Outline Dimension Diagram

	A	B	C	D	H
mm	1220	225	1158	280	700
inch	48	8 7/8	45 5/8	11	27 1/2

TOSOT

5965 Chemin de la Côte de Liesse
Saint Laurent, QC, Canada, H4T 1C3

Contact: +1 438 792 1956

info@tosotusa.com

www.tosotusa.com